
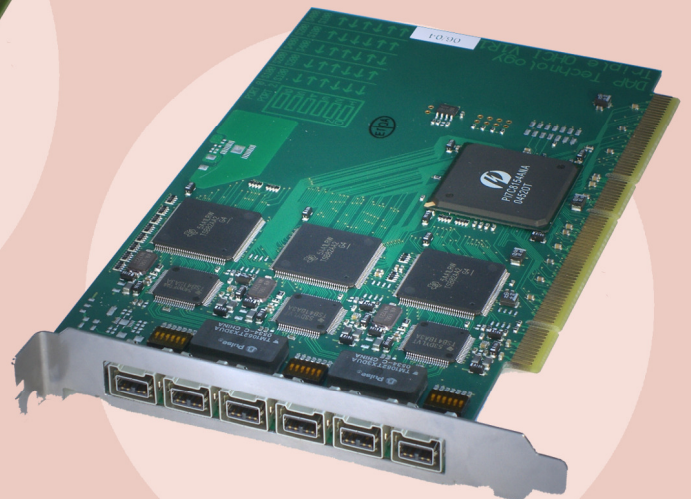


INTERFACE SOLUTIONS

Mi1394 ADAPTERS

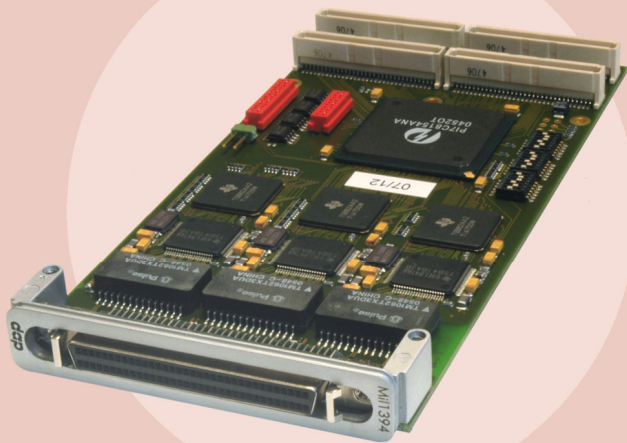

Mil1394

Description


DapTechnology offers two kinds of **Mil1394b 3-channel OHCI Adapters**, i.e. a PCI version and a PMC version. They address the growing need for multi-channel and transformer-coupled bus interface solutions, primarily in mission critical aerospace and defense applications requiring longer distances according to SAE AS5643-1.

Both adapter cards, which support standard 64 bit/ 66 MHz PCI interfaces, are fully OHCI compliant and feature 3 independent IEEE1394b channels. The product accommodates off-the-shelf IEEE1394b OHCI drivers from Windows™ & Linux-based operating systems. No driver modification/installation is required. Please contact DapTechnology directly regarding support for real-time operating systems like Integrity, VxWorks, etc.

The **Mil1394b 3-Channel OHCI Adapter** use the TSB41BA3 physical layer silicon from Texas Instruments and supports data transfer rates of up to 400 Mbps in Beta mode. As a special feature, the port modes on each PHY can be programmed independently via dip switches.

Key Features



- IEEE 1394b-2002 compliant
- Supports 100b, 200b, 400b data transfer rates
- 3 independent nodes with a total of 6 IEEE1394 ports.
 - active transformer coupled
 - Beta connectors
 - Port mode programming via dip switches
- PCI 2.1 compliant
- Supported by Windows™ 2000 and XP
 - Driver Level
 - API Level
- Driver/API Level Support for VxWorks™ and Integrity™ planned

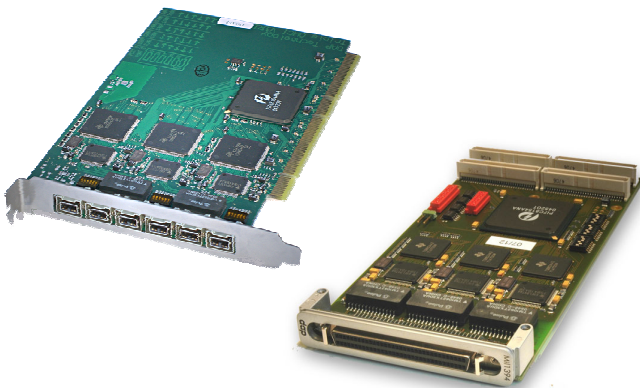

Windows™ is a registered trademark of Microsoft Corp.
 VxWorks™ is a registered trademark of Wind River Systems Inc.
 Integrity™ is a registered trademark of Green Hills Software Inc.

SPECIFICATION:

Dimensions:	PCI: half length, 15 x 106 x 174 mm PMC: 15 x 74 x 154 mm
Weight:	PCI: 760 / PMC: 100 g
Operating Range:	0 – 70 C
Power Requirements:	PCI: 12 V, 10 Watt maximum PMC: 12 V, 7 Watt maximum
Compliance:	FCC Class A
Connections:	64bit/66MHz PCI connector, universal keyed (for 3.3V and 5V slots) 6 IEEE1394-connectors (Beta) transformer coupled 64-bit PMC connector configuration off-board connector with fan-out cable for 9 bus connections
Indicators:	-
Switches:	3 dip switches for port mode programming
Package Content:	Mil1394b 3OHCI adapter User Guide 1 x fan-out cable with 9 x 1394b (Beta)
Product warranty:	12 months limited warranty
Part Number:	PCI: PCI341bT / PMC: PMC341bT
Optional Configuration:	-
SW Add-on modules:	-

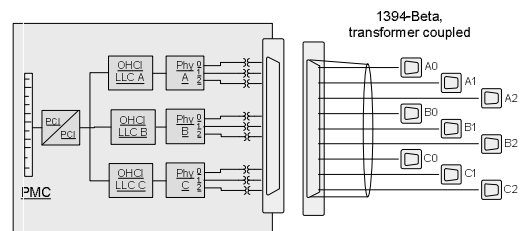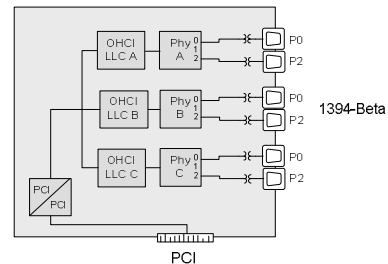

CONTACT INFORMATION:

DapTechnology B.V.
 Zutphenstraat 67
 7575EJ Oldenzaal
 the Netherlands
 Ph: +31 541 532941
 Fax: +31 541 530193
sales@daptechnology.com
www.daptechnology.com

DapUSA, Inc.
 780 W San Angelo Street
 Gilbert, AZ 85233
 United States of America
 Ph: (480) 422 1551
 Fax: (302) 439 3947
sales@daptechnology.com
www.daptechnology.com

